




TECHNICAL INFORMATION

SlimWall mouldings


Description

Range	ACOUSTIC SOLUTIONS
Type	Compact felt panels to paste: <i>Versailles, Rivoli, Hausmann, Minneapolis</i>
Composition	Polyester from recycled plastic bottles
Thickness	9mm and 14.5mm
Formats	panels of 1200x800
Colours	15 / brochure SlimColor
Suitability	walls
Installation method	paste
Care	injecteur- extracteur / damp cloth
Felt density	2kg/m ²
Design	2D (2 cut-outs) and 3D (3 cut-outs)

2D



3D



Regulations- environment

Fire rating – EN 13501-1 :2018	B S2 d0
Acoustic NF EN ISO354 – NF EN ISO 11654	alpha w 0.25(2D) to 0.30(3D)
Light fastness	3-4 /7 grey scale
Bleaching	5/5 grey scale
Environment	oekotex certified

Packaging

Bow dimensions in mm	1200x800x500
Kit	Kit of 3 1200x800 panels
Packed Weight	8kg

Installation

Paste	Ovalit TM and Ovalit F (Metylan – Henkel)
Method	Paste the wall using a roller or brush
Quantity of paste	350 to 500g/m ²

Finishings

Skirtings



Installation
Characteristics
Dimensions

Apply sealant to the skirting / install on the floor
9mm notch to slide the panel through
H= 100mm x L = 2500mm x E = 15mm

Bevelled picture rail



Installation
Characteristics
Dimensions

Apply sealant to the picture rail / install on the top of the panel
For use with base panels
H= 50mm x L = 2500mm x E = 15mm

Connecting picture rail



Installation
Characteristics
Dimensions

Apply sealant to the picture rail / install on the top of the panel
Allows use of a base panel with another panel above
H= 50mm x L = 2500mm x E = 15mm




TECHNICAL INFORMATION


SlimWall Panelling

Description


Range	ACOUSTIC SOLUTIONS
Type	Compact felt panels to paste : <i>Chicago, Amsterdam, London</i>
Composition	Polyester from recycled plastic bottles
Thickness	From 9mm to 27mm
Formats	Panels of 800mmx400mm
Colours	15 / brochure SlimColor
Suitability	Walls
Installation	paste
Care	Injecteur- extracteur/ damp cloth
Felt density	2kg/m ²
Designs	

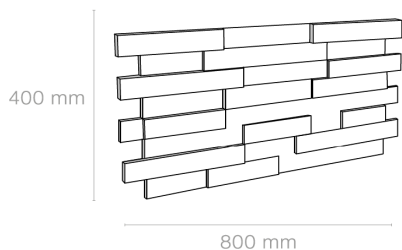

Chicago

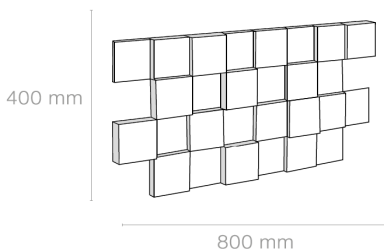

London

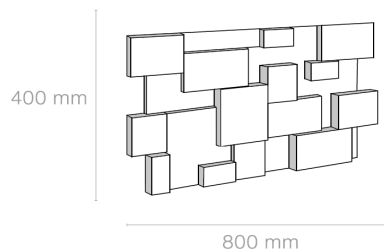

Amsterdam

Regulations - environment

Fire rating – EN 13501-1 :2018	B S2 d0
Acoustic NF EN ISO354 – NF EN ISO 11654	alpha w
<i>Chicago</i>	0.35
<i>Amsterdam</i>	0.40
<i>London</i>	0.45
Light fastness	3-4 /7 grey scale
Bleaching	5/5 grey scale
Environment	oekotex certified

Packaging

Box dimensions	810mmx410mmx230mm
Kit	Kit of 9 800mmx400mm panels
Packed weight	From 15kg to 25kg

Installation

Paste	Ovalit TM and Ovalit F (Metylan – Henkel)
Method	Paste the wall using a roller or brush
Quantity of Paste	350 to 500g/m ²
Application	Interlocking
Hanging instructions	www.texdecor.com